
	Model (Quadraplex)	Typical	RO	Max Flow To	Pipe Size		Media	Mineral Tank		Installation			Shipping	Operating
		System Flow Rate		Drain	Service	Drain	Per Tank	Diameter	Height	Height	Depth	Width	Weight	Weight
		USGPM	USGPM	USGPM	in	in	CF	in	in	in	in	in	lbs	lbs
		I/s	l/s	l/s	mm	mm	m³	mm	mm	mm	mm	mm	kg	kg
Ī	95MTS	40	32	14	1.25"	1"	2.65	14	65	79	20	80	1,652	3,252
•	MM14-1.25"	2.52	2	0.88	32	25	0.075	356	1651	2006.6	508	2032	752	1,475
	95MTS	56	44	17	1.25"	1"	3.5	16	65	79	22	88	2,052	4,052
	MM16-1.25"	3.52	2.76	1.07	32	25	0.1	406	1651	2006.6	559	2236	931	1,838
	95MTS	68	52	21	1.25"	1"	4.4	18	65	79	24	96	2,604	5,004
	MM18-1.25"	4.284	3.276	1.32	32	25	0.125	475	1651	2006.6	610	2440	1,181	2,270

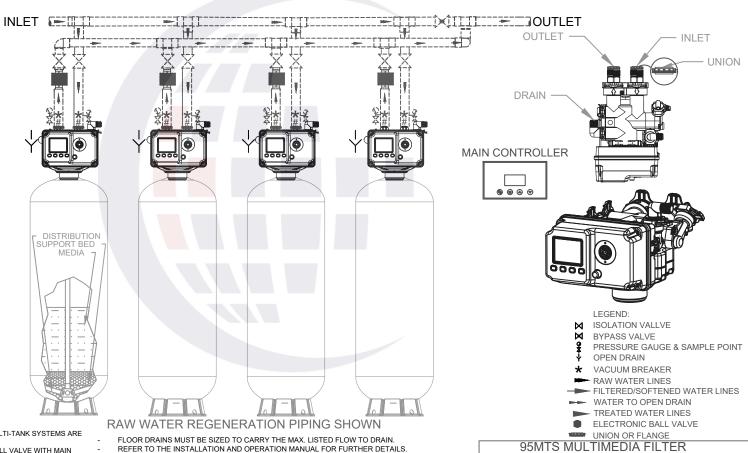

## NOTES

- QUADRAPLEX FILTER, CALENDAR CLOCK INITIATED, MULTI-TANK SYSTEMS ARE SERIES REGENERATION.
- FILTER IS EQUIPPED WITH 1.25" VALVE ELECTRONIC BALL VALVE WITH MAIN ELECTRONIC CONTROLLER.
- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C).
- REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.

USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE. SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, & LOCAL CODES,

MEDIA BED CONSISTS OF NSF APPROVED ANTRAFILT, FINE FILTER SAND FINE & COARSE GARNET ON A GRADED SUPPORT BED.



## 1.25" QUADRAPLEX SYSTEM

HIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO THIS DUCUMENT CONTAINS INFORMATION WHICH IS PROPHIETARY TO
CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER
EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED
WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE
WANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS,
WHICH MAY DEVATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED

	PRODUCTS OR TO NOTE THE CHANGE.		
O	Project	Date 10-18-2017	Rev
on		Dwg # 95MTS MM1.25Q	0