
	Model (Triplex)	Typical	RO	Max Flow To	Pipe Size		Media	lia Mineral Tank		Installation			Shipping Weight	Operating Weight
		System Flow Rate		Drain	Service	Drain	Per Tank Diameter Height Height	Depth	Width					
		USGPM	USGPM	USGPM	in	in	CF	in	in	in	in	in	lbs	lbs
		I/s	l/s	I/s	mm	mm	m³	mm	mm	mm	mm	mm	kg	kg
ſ	95MTS	30	24	14	1.25"	1"	2.65	14	65	79	20	60	1,239	2,439
	MM14-1.25"	1.89	1.5	0.88	32	25	0.075	356	1651	2006.6	508	1524	564	1,107
•	95MTS	42	33	17	1.25"	1"	3.5	16	65	79	22	66	1,539	3,039
	MM16-1.25"	2.64	2.07	1.07	32	25	0.1	406	1651	2006.6	559	1677	698	1,379
Π	95MTS	51	39	21	1.25"	1"	4.4	18	65	79	24	72	1,953	3,753
Į	MM18-1.25"	3.213	2.457	1.32	32	25	0.125	475	1651	2006.6	610	1830	886	1,703



NOTES

- TRIPLEX FILTER, CALENDAR CLOCK INITIATED, MULTI-TANK SYSTEMS ARE SERIES REGENERATION.
- FILTER IS EQUIPPED WITH 1.25" VALVE ELECTRONIC BALL VALVE WITH MAIN ELECTRONIC CONTROLLER.
- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C).
- REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.
- USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE.
- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, & LOCAL CODES,
- MEDIA BED CONSISTS OF NSF APPROVED ANTRAFILT, FINE FILTER SAND FINE & COARSE GARNET ON A GRADED SUPPORT BED.

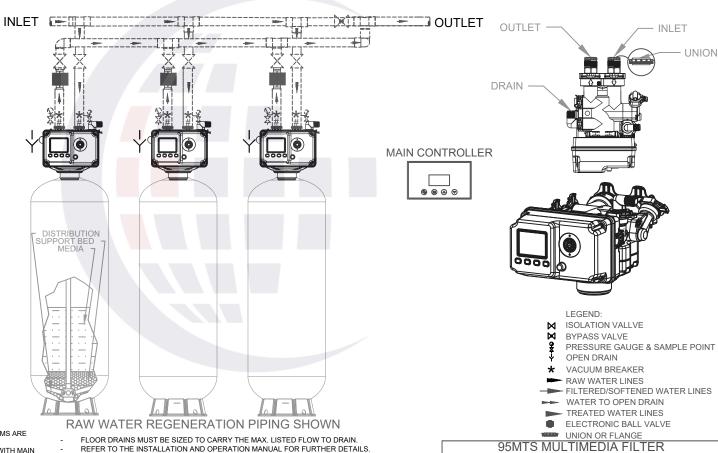

95MTS MULTIMEDIA FILTER 1.25" TRIPLEX SYSTEM

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED RODUCTS OR TO NOTE THE CHANGE.

Project	Date 10-18-2017	Rev
	Dwg # 95MTS MM1.25T	0