
▶	Model (Quadraplex)	Typical	Peak	RO	Max Flow To Drain	Pipe Size		Media	Minera	Mineral Tank		Installation			Operating Weight
		Max.System Recommended Flow Rates				Service	Drain	Per Tank	Diameter	Height	Height	Depth	Width	Weight	
		USGPM	USGPM	USGPM	USGPM	in	in	CF	in	in	in	in	in	lbs	lbs
		I/s	I/s	I/s	I/s	mm	mm	m³	mm	mm	mm	mm	mm	kg	kg
	95MTS	40	60	32	14	1.25"	1"	2.75	14	65	79	20	80	1,372	2,972
	NX14-1.25"	2.52	3.8	2	0.88	32	25	0.078	356	1651	2006.6	508	2032	623	1,348
	95MTS	56	80	44	17	1.25"	1"	3.5	16	65	79	22	88	1,714	3,714
	NX16-1.25"	3.52	5.04	2.76	1.07	32	25	0.1	406	1651	2006.6	559	2236	778	1,685
	95MTS	68	104	52	21	1.25"	1"	4.5	18	65	79	24	96	2,174	4,574
	NX18-1.25"	4.284	6.56	3.276	1.32	32	25	0.127	475	1651	2006.6	610	2440	986	2,075



NOTES

- QUADRAPLEX FILTER, CALENDAR CLOCK INITIATED, MULTI-TANK SYSTEMS ARE SERIES REGENERATION.
- FILTER IS EQUIPPED WITH 1.25" VALVE ELECTRONIC BALL VALVE WITH MAIN ELECTRONIC CONTROLLER.
- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C).
- REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.

USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE. SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, & LOCAL CODES, MEDIA BED CONSISTS OF NSF APPROVED, NEXTSAND ON A GRADED SUPPORT BED

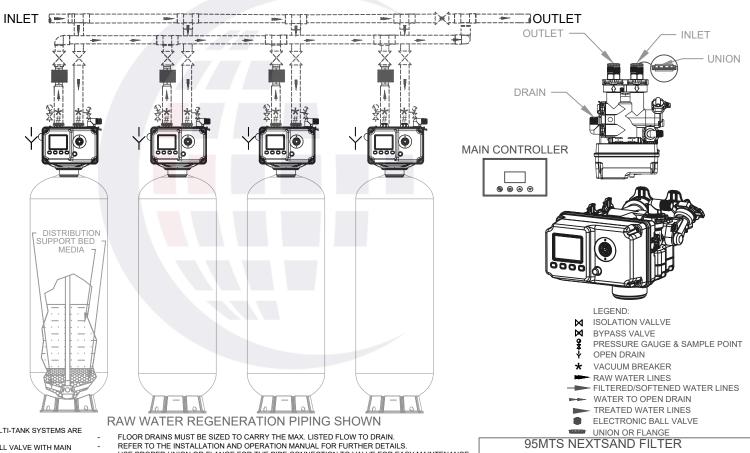

1.25" QUADRAPLEX SYSTEM

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER CANATURE WATERGROUP. THE REPRODUCTION, ITANSPER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED

RODUCTS OR TO NOTE THE CHANGE. Rev

Date 10-18-2017 Dwg # 95MTS NX1.25Q