
	Model (Triplex)	Typical	Peak	RO	Max Flow To Drain	Pipe Size		Media	Mineral Tank		Installation			Shipping Weight	Operating Weight
		Max.System Recommended Flow Rates				Service	Drain	Per Tank	Diameter	Height	Height	Depth	Width	The state of the s	
		USGPM	USGPM	USGPM	USGPM	in	in	CF	in	in	in	in	in	lbs	lbs
		I/s	I/s	I/s	I/s	mm	mm	m³	mm	mm	mm	mm	mm	kg	kg
•	95MTS	30	45	24	14	1.25"	1"	2.75	14	65	79	20	60	1,029	2,229
	NX14-1.25"	1.89	2.85	1.5	0.88	32	25	0.078	356	1651	2006.6	508	1524	467	1,011
	95MTS	42	60	33	17	1.25"	1"	3.5	16	65	79	22	66	1,286	2,786
	NX16-1.25"	2.64	3.78	2.07	1.07	32	25	0.1	406	1651	2006.6	559	1677	583	1,264
	95MTS	51	78	39	21	1.25"	1"	4.5	18	65	79	24	72	1,631	3,431
	NX18-1.25"	3.213	4.92	2.457	1.32	32	25	0.127	475	1651	2006.6	610	1830	740	1,556



NOTES

- TRIPLEX FILTER, CALENDAR CLOCK INITIATED, MULTI-TANK SYSTEMS ARE SERIES REGENERATION.
- FILTER IS EQUIPPED WITH 1.25" VALVE ELECTRONIC BALL VALVE WITH MAIN ELECTRONIC CONTROLLER.
- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C).
- REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.
- USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE.
- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, & LOCAL CODES,
- MEDIA BED CONSISTS OF NSF APPROVED, NEXTSAND ON A GRADED SUPPORT BED

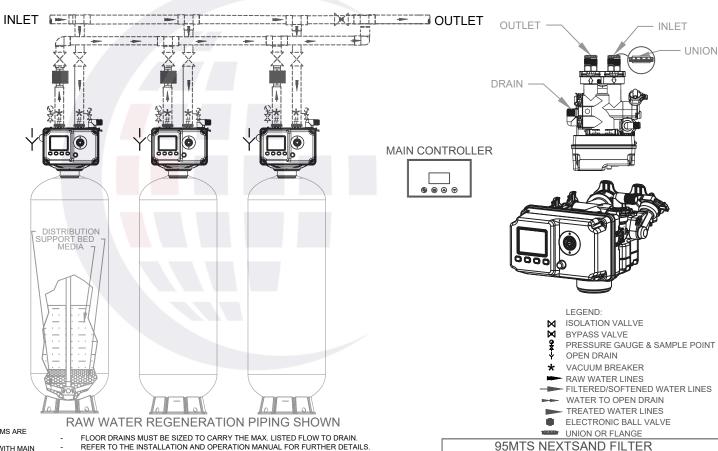

95MTS NEXTSAND FILTER 1.25" TRIPLEX SYSTEM

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER
EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED
WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE
MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS,
WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED
HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED

RODUCTS OR TO NOTE THE CHANGE. Rev Date 10-18-2017

Dwg # 95MTS NX1.25T