
	Model (Single)	Typical	RO Pretreat	Max Flow To	Pipe Size		Media	Mineral Tank		Installation			Shipping	Operating
		Service Flow Rate		Drain	Service	Drain	Per Tank	Diameter	Height	Height	Depth	Width	Weight	Weight
		USGPM	USGPM	USGPM	in	in	CF	in	in	in	in	in	lbs	lbs
		I/s	I/s	I/s	mm	mm	m³	mm	mm	mm	mm	mm	kg	kg
<b>+</b>	CW AC14-1"	6	3	11	1"	1"	2.75	14	65	79	20	20	263	663
		0.38	0.19	0.69	25	25	0.078	356	1,651	2,007	508	508	119	301
	CW AC16-1"	8	4	14	1"	1"	3.5	16	65	79	22	22	303	803
		0.5	0.25	0.88	25	25	0.1	406	1,651	2,007	559	559	137	364
	CW AC18-1"	10	5	17	1"	1"	4.5	18	65	79	24	24	395	995
		0.63	0.32	1.073	25	25	0.127	475	1,651	2,007	610	610	179	451



## RAW WATER REGENERATION PIPING SHOWN

## NOTES

- SINGLE FILTER, CALENDAR CLOCK INITIATED,
- FILTER EQUIPPED WITH 1" VALVES WITH ELECTRONIC CONTROLLER. MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSI (690 kPa) AND
- MINIMUM INLET PRESSURE IS 40 PSI.
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 100 °F (38 °C). REQUIRES 120 VOLT, 1 PHASE, 60 Hz ELECTRICAL POWER.
- ALL EXTERNAL PIPING, FITTINGS, AND VALVES SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS.
- MINERAL TANKS AND MEDIA ARE NSF APPROVED.
- DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS AND A VACUUM BREAKER MAY BE REQUIRED. FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE WARRANTY.
- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, & LOCAL CODES.
- FLOOR DRAINS MUST BE SIZED TO CARRY THE MAX. LISTED FLOW TO DRAIN.
- REFER TO THE INSTALLATION AND OPERATION MANUAL FOR FURTHER DETAILS.
- USE PROPER UNION OR FLANGE FOR THE PIPE CONNECTION TO VALVE FOR EASY MAINTENANCE.
- MEDIA BED CONSISTS OF 12 x 40 MESH, NSF APPROVED ACID WASHED COCONUT BASED ACTIVATED CARBON ON A GRADED SUPPORT BED

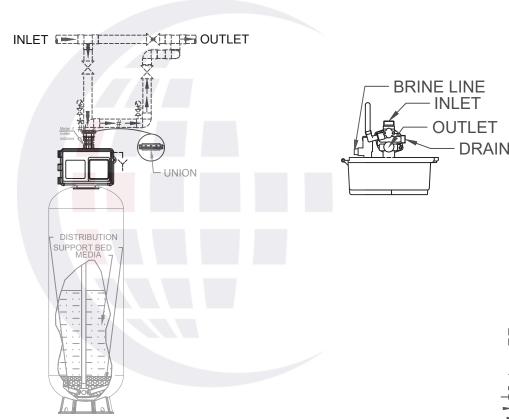

## LEGEND:

■ ISOLATION VALLVE

BYPASS VALVE

PRESSURE GAUGE & SAMPLE POINT

OPEN DRAIN

\* VACUUM BREAKER

RAW WATER LINES

FILTERED/SOFTENED WATER LINES

➤ WATER TO OPEN DRAIN

TREATED WATER LINES

ELECTRONIC BALL VALVE

UNION OR FLANGE

DIAPHRAGM VALVE

## CW ACTIVATED CARBON FILTER

1" SINGLE SYSTEM

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED PRODUCTS OR TO NOTE THE CHANGE.

Project	Date 10-18-2017	Rev
	Dwg # CW AC1S	0